


Polished bolt for welding in AISI-316 stainless steel

Flap model for welding

- Specific for gates and gates, not only made of stainless steel but also made of iron, offering greater resistance and durability than the iron lock.
- The usual classic embodied in stainless steel with excellent resistance to corrosion since we have AISI-316 stainless steel and also excellent mirror polishing.
- Glossy and satin polished finishes.
- Made of stainless steel EN-1.440, AISI-316.
- Manufacturing dimensions in rods of Ø 8, 10, 12 and 16 mm.
- Standard lengths are 85,100,150,200,250,300,400,600 and 800 mm

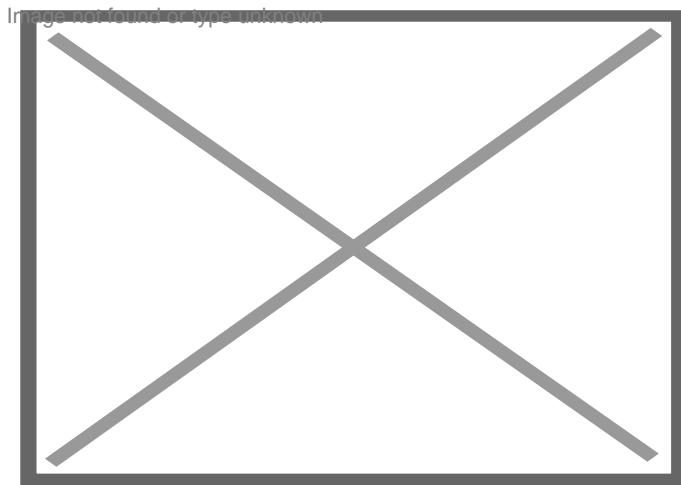

Technical information

| Código | Referencia | Descripción | Medidas | Peso(g) |
|--------|------------------------|-------------|------------|---------|
| | Varilla de 8 mm | | | |
| | SO85x8/S | | 85 x 8 mm | 70 |
| | SO85x8/P | | 85 x 8 mm | 70 |
| | SO100x8/S | | 100 x 8 mm | 76 |
| | SO100x8/P | | 100 x 8 mm | 76 |

| | | | | |
|-----------------|-------------------------|------------------------------|-------------|-----|
| | SO150x8/S | | 150 x 8 mm | 105 |
| | SO150x8/P | | 150 x 8 mm | 105 |
| | SO200x8/S | | 200 x 8 mm | 120 |
| | SO200x8/P | | 200 x 8 mm | 120 |
| | SO250x8/S | | 250 x 8 mm | 140 |
| | SO250x8/P | | 250 x 8 mm | 140 |
| | SO300x8/S | | 300 x 8 mm | 166 |
| | SO300x8/P | | 300 x 8 mm | 166 |
| | SO400x8/S | | 400 x 8 mm | 198 |
| | SO400x8/P | | 400 x 8 mm | 198 |
| | SO600x8/S | | 600 x 8 mm | 285 |
| | SO600x8/P | | 600 x 8 mm | 285 |
| | SO800x8/S | | 800 x 8 mm | 365 |
| | SO800x8/P | | 800 x 8 mm | 365 |
| | Varilla de 10 mm | | | |
| | SO100x10/S | | 100 x 10 mm | 111 |
| | SO100x10/P | | 100 x 10 mm | 111 |
| | SO150x10/S | | 150 x 10 mm | 153 |
| | SO150x10/P | | 150 x 10 mm | 153 |
| | SO200x10/S | | 200 x 10 mm | 184 |
| | SO200x10/P | | 200 x 10 mm | 184 |
| | SO250x10/S | | 250 x 10 mm | 208 |
| | SO250x10/P | | 250 x 10 mm | 208 |
| | SO300x10/S | | 300 x 10 mm | 240 |
| | SO300x10/P | | 300 x 10 mm | 240 |
| | SO400x10/S | | 400 x 10 mm | 295 |
| | SO400x10/P | | 400 x 10 mm | 295 |
| | SO500x10/S | | 500 x 10 mm | |
| | SO500x10/P | | 500 x 10 mm | |
| | SO600x10/S | | 600 x 10 mm | |
| | SO600x10/P | | 600 x 10 mm | |
| | SO800x10/S | | 800 x 10 mm | |
| | SO800x10/P | | 800 x 10 mm | |
| | Varilla de 12 mm | | | |
| | SO150x12/S | | 150 x 12 mm | 235 |
| 180113SO150X12P | SO150x12/P | CERROJO SOLDAR 150x12 PULIDO | 150 x 12 mm | 235 |
| | SO200x12/S | | 200 x 12 mm | 315 |
| 180113SO200X12P | SO200x12/P | CERROJO SOLDAR 200x12 PULIDO | 200 x 12 mm | 315 |
| | SO250x12/S | | 250 x 12 mm | 357 |
| 180113SO250X12P | SO250x12/P | CERROJO SOLDAR 250x12 PULIDO | 250 x 12 mm | 357 |

| | | | | |
|-----------------|-------------------------|------------------------------|-------------|------|
| | SO300x12/S | | 300 x 12 mm | 480 |
| 180113SO300X12P | SO300x12/P | CERROJO SOLDAR 300x12 PULIDO | 300 x 12 mm | 480 |
| | SO400x12/S | | 400 x 12 mm | 490 |
| 180113SO400X12P | SO400x12/P | CERROJO SOLDAR 400x12 PULIDO | 400 x 12 mm | 490 |
| | SO500x12/S | | 500 x 12 mm | 595 |
| 180113SO500X12P | SO500x12/P | CERROJO SOLDAR 500x12 PULIDO | 500 x 12 mm | 595 |
| | SO600x12/S | | 600 x 12 mm | 665 |
| 180113SO600X12P | SO600x12/P | CERROJO SOLDAR 600x12 PULIDO | 600 x 12 mm | 665 |
| | SO800x12/S | | 800 x 12 mm | 837 |
| 180113SO800X12P | SO800x12/P | CERROJO SOLDAR 800x12 PULIDO | 800 x 12 mm | 837 |
| | Varilla de 16 mm | | | |
| | SO150x16/S | | 150 x 16 mm | 432 |
| | SO150x16/P | | 150 x 16 mm | 423 |
| | SO200x16/S | | 200 x 16 mm | 546 |
| | SO200x16/P | | 200 x 16 mm | 546 |
| | SO250x16/S | | 250 x 16 mm | 620 |
| | SO250x16/P | | 250 x 16 mm | 620 |
| | SO300x16/S | | 300 x 16 mm | 666 |
| | SO300x16/P | | 300 x 16 mm | 666 |
| | SO400x16/S | | 400 x 16 mm | 812 |
| | SO400x16/P | | 400 x 16 mm | 812 |
| | SO500x16/S | | 500 x 16 mm | 1007 |
| | SO500x16/P | | 500 x 16 mm | 1007 |
| | SO600x16/S | | 600 x 16 mm | 1200 |
| | SO600x16/P | | 600 x 16 mm | 1200 |