

Bend 15° Male-Male


Manufacturing standards: DVGW round tubes manufactured according to DIN-1988/2463 EN 10312 Tubes with DVGW TS 225 approval correspond to the requirements of DVGW worksheet W 541

Certificates: Standard supply in lengths of 6 m. We provide product certificates if required, according to the following standard: EN 10204/3.1.B or DIN 50049.

Grades: Austenitic grades types 304-L, 316-L

Dimensions: Manufactured in diameters from 15 mm to 108 mm. Wall thicknesses from 1 to 2 mm

Applications: DVGW W 541 tubes are used in the transport of drinking and chlorinated water up to 2 mg/l in water with AISI-316 L pipes, AISI-304 L quality is used in compressed air installations.

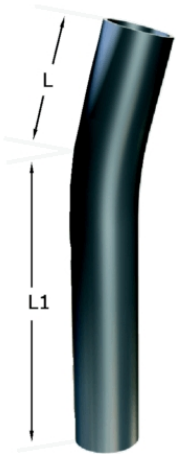

Technical information

DN	Dimensiones			Art.
	Tubo Ø	L	L1	
12	15	39	39	0892
15	18	40	40	0893
20	22	43	43	0894
25	28	45	45	0905
32	35	53	53	0906
40	42	59	59	0907
50	54	67	67	0908
65	76,1	163	163	0909
80	88,9	160	160	0910
100	108	154	154	0911