

## Bends Deviating Angles Male-Male


**Manufacturing standards:** DVGW round tubes manufactured according to DIN-1988/2463 EN 10312 Tubes with DVGW TS 225 approval correspond to the requirements of DVGW worksheet W 541

**Certificates:** Standard supply in lengths of 6 m. We provide product certificates if required, according to the following standard: EN 10204/3.1.B or DIN 50049.

**Grades:** Austenitic grades types 304-L, 316-L

**Dimensions:** Manufactured in diameters from 15 mm to 108 mm. Wall thicknesses from 1 to 2 mm

**Applications:** DVGW W 541 tubes are used in the transport of drinking and chlorinated water up to 2 mg/l in water with AISI-316 L pipes, AISI-304 L quality is used in compressed air installations.

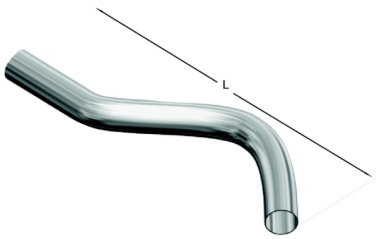

### Technical information

| DN | Dimensiones |     | Art. |
|----|-------------|-----|------|
|    | Tubo Ø      | L   |      |
| 15 | 15          | 158 | 0802 |
| 15 | 18          | 165 | 0803 |
| 20 | 22          | 178 | 0804 |
| 25 | 28          | 210 | 0805 |