


## Elastic pin DIN-1481

The cylindrical pin with a longitudinal groove. When the pin is inserted into the hole, it is compressed and retained due to the elastic force exerted against the walls of said hole. The slot is reduced in width, but still remains open.

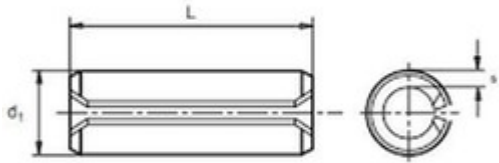

### Technical information

d	d1 min.
M1	1.2
M1,5	1.7
M2	2.3
M2,5	2.8
M3	3.3
M4	4.4
M5	5.4
M6	6.4
M8	8.5
M10	10.5

M12	12.5
M16	16.5