


## Machine foot TYPE XH

### TYPE XH

The foot seals all moving components 100% hygienically, although the load supported on the foot is eliminated. **Type XH is approved for the use of machinery and equipment for food, dairy and pharmaceutical processing industries**

It is recommended to apply the XH system in sectors where hygiene and cleanliness levels are very high. **The XH design reduces cleaning time to a minimum.**

[Access to the catalog](#)

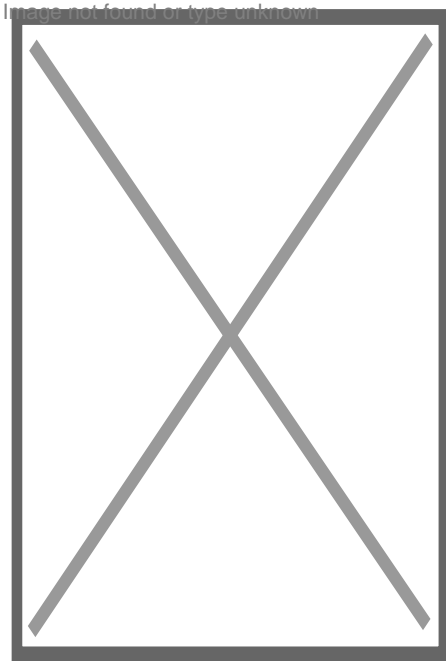

### Technical information

Base					
Código	Diámetro Ø	Altura B	Carga nom.		

	80 mm	33 mm	15.000 N		
	105 mm	33 mm	22.000 N		
	125 mm	34 mm	32.000 N		
	150 mm	34 mm	70.000 N		
<b>Espárrago roscado</b>					
<b>Código</b>	<b>Artículo nº</b>	<b>Métrica D</b>	<b>Longitud A</b>	<b>Longitud L</b>	<b>Llave</b>
	XH 16150	M 16	150 mm	76 mm	13 mm
	XH 16210	M 16	210 mm	106 mm	13 mm
	XH 20150	M 20	150 mm	76 mm	15 mm
	XH 20210	M 20	210 mm	106 mm	15 mm
	XH 24150	M 24	150 mm	76 mm	19 mm
	XH 24210	M24	210 mm	106 mm	19 mm
	XH 30150	M30	150 mm	76 mm	24 mm
	XH 30210	M30	210 mm	106 mm	24 mm
	XH 36150	M 36	150 mm	76 mm	30 mm
	XH 36210	M 36	210 mm	106 mm	30 mm