


Machine feet Type M Fixation

Type M - Fixation

This model has one or two lugs that are embedded in the foot and are fixed to the floor to avoid vibrations. The encrusted rubber is approved for food products, conveniently rounded for easy cleaning. It can absorb up to 5° of unevenness in the ground and equipment.

[Catalog access](#)

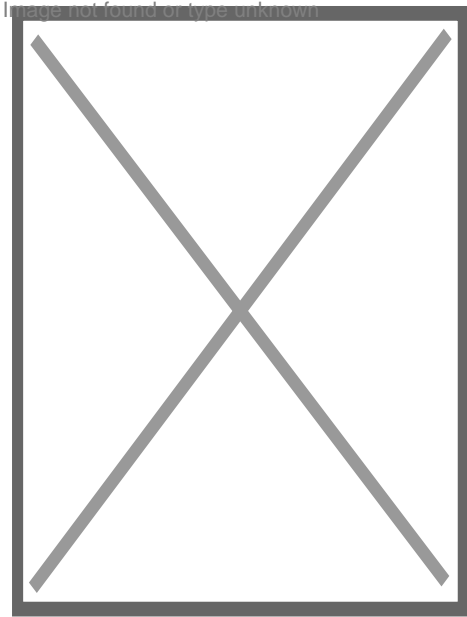

Technical information

| Base | | | | | | |
|----------|------|------------|----------|------------|-------------------------|-------------|
| Código | | Diámetro Ø | Altura B | Longitud E | Diámetro del agujero D1 | Carga norm. |
| 44310M76 | M 76 | 75 mm | 22 mm | 52 mm | 15 mm | 12.000 N |
| 44310M77 | M 77 | 75 mm | 22 mm | 52 mm | 15 mm | 12.000 N |

| | M 106 | 100 mm | 32 mm | 67 mm | 15 mm | 14.000 n |
|--------------------------|-------------------|--------------|--------------|--------------|--------------|--------------|
| Espárrago roscado | | | | | | |
| Longitud | Diámetro Ø | | | | | |
| | Ø 10 | Ø 12 | Ø 14 | Ø 16 | Ø 20 | Ø 24 |
| 50 mm | | | | | | |
| 70 mm | | | | | | |
| 83 mm | 44310ME10083 | 44310ME12083 | 44310ME14083 | 44310ME16083 | | |
| 100 mm | 44310ME10100 | 44310ME12100 | | 44310ME16100 | 44310ME20100 | 44310ME24100 |
| 150 mm | | 44310ME12150 | | 44310ME16151 | 44310ME20150 | 44310ME24150 |
| 180 mm | | | | | | |
| 230 mm | | | | | | |
| 310 mm | | | | | | |