

Spring positioners GN 817.2-NI

Body

AISI 303 stainless steel.

Pivot

Nickel-plated and rectified AISI 303 stainless steel. Hole in H7 tolerance is recommended.

Locknut


AISI 303 stainless steel.

knurled knob

High resistance polyamide (PA) based technopolymer, black color, matte finish. Resistant to solvents, oils, greases and other chemical agents.

Standard executions available

- **Model B:** without locking position and without locknut.
- **BK model:** with locking position and with locknut, ISO 8675.
- **Model C:** with locking position and without locknut.

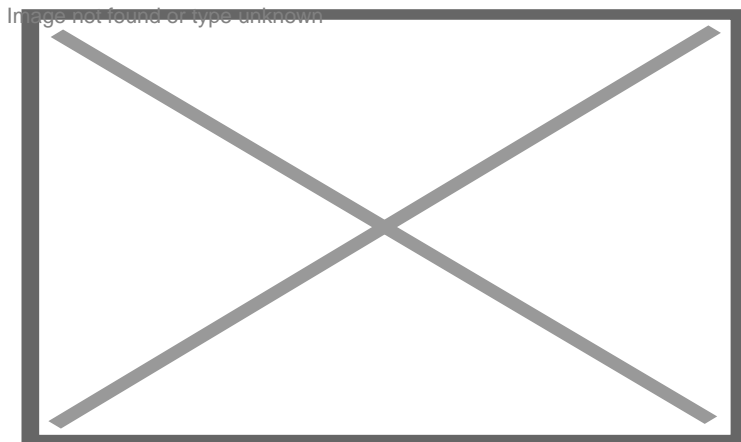

Technical information

Códigos	Elementos standard	Dimensiones principales										Presión muelle		Peso
	Descripción	d1 -0.02 -0.04	I1	d2	d3 k	I2	I3	I4	A/F	Pretensado	Carga máx.	g		
	GN 817.2-4-4-B-NI	4	4	M8x1	16214216	5	10			4.5	12	11		
	GN 817.2-4-6-B-NI	4	6	M8x1	16214216	5	10			4	12.5	11		
	GN 817.2-5-5-B-NI	5	5	M10x1	19244818	6	12			5	15	19		
	GN 817.2-5-8-B-NI	5	8	M10x1	19244818	6	12			5	18	19		
	GN 817.2-6-6-B-NI	6	6	M12x1.523305822	6	14				6.5	19	32		
	GN 817.2-6-9-B-NI	6	9	M12x1.523305822	6	14				6	25	32		
	GN 817.2-8-8-B-NI	8	8	M16x1.528367026	8	17				8.5	26	68		
44310GN8172812B	GN 817.2-8-12-B-NI	8	12	M16x1.528367026	8	17				8.5	28	67		
	GN 817.2-10-12-B-NI	10	12	M16x1.528367026	8	17				9.5	38	69		
	GN 817.2-12-15-B-NI	12	15	M20x1.528367933	10	22				11.5	40	117		
	GN 817.2-4-4-BK-NI	4	4	M8x1	16214216	5	10			4.5	12	12		
	GN 817.2-4-6-BK-NI	4	6	M8x1	16214216	5	10			4	12.5	12		
	GN 817.2-5-5-BK-NI	5	5	M10x1	19244818	6	12			5	15	20		
	GN 817.2-5-8-BK-NI	5	8	M10x1	19244818	6	12			5	18	20		
	GN 817.2-6-6-BK-NI	6	6	M12x1.523305822	6	14				6.5	19	33		
	GN 817.2-6-9-BK-NI	6	9	M12x1.523305822	6	14				6	25	33		
	GN 817.2-8-8-BK-NI	8	8	M16x1.528367026	8	17				8.5	26	69		
	GN 817.2-8-12-BK-NI	8	12	M16x1.528367026	8	17				8.5	28	69		
	GN 817.2-10-12-BK-NI	10	12	M16x1.528367026	8	17				9.5	38	71		
	GN 817.2-12-15-BK-NI	12	15	M20x1.528367933	10	22				11.5	40	151		
	GN 817.2-4-4-C -NI	4	4	M8x1	16214216	5	10			4.5	12	12		
	GN 817.2-4-6-C -NI	4	6	M8x1	16214216	5	10			4	12.5	13		
	GN 817.2-5-5-C -NI	5	5	M10x1	19244818	6	12			5	15	21		
44310GN81725CNI	GN 817.2-5-8-C -NI	5	8	M10x1	19244818	6	12			5	18	22		
	GN 817.2-6-6-C -NI	6	6	M12x1.523305822	6	14				6.5	19	35		
	GN 817.2-6-9-C -NI	6	9	M12x1.523305822	6	14				6	25	36		
	GN 817.2-8-8-C -NI	8	8	M16x1.528367026	8	17				8.5	26	73		
44310GN8172812C	GN 817.2-8-12-C -NI	8	12	M16x1.528367026	8	17				8.5	28	71		
	GN 817.2-10-12-C -NI	10	12	M16x1.528367026	8	17				9.5	38	74		
	GN 817.2-12-15-C -NI	12	15	M20x1.528367933	10	22				11.5	40	125		
	GN 817.2-4-4-CK-NI	4	4	M8x1	16214216	5	10			4.5	12	13		
	GN 817.2-4-6-CK-NI	4	6	M8x1	16214216	5	10			4	12.5	13		
	GN 817.2-5-5-CK-NI	5	5	M10x1	19244818	6	12			5	15	22		
44310GN817258BNI	GN 817.2-5-8-CK-NI	5	8	M10x1	19244818	6	12			5	18	22		

	GN 817.2-6-6-CK-NI	6	6 M12x1.523305822 6 14	6.5	19	36
	GN 817.2-6-9-CK-NI	6	9 M12x1.523305822 6 14	6	25	37
	GN 817.2-8-8-CK-NI	8	8 M16x1.528367026 8 17	8.5	26	75
	GN 817.2-8-12-CK-NI	8	12M16x1.528367026 8 17	8.5	28	72
	GN 817.2-10-12-CK-NI	10	12M16x1.528367026 8 17	9.5	38	77
44310GN81721215C	GN 817.2-12-15-CK-NI	12	15M20x1.528367933 10 22	11.5	40	151