

Indexing Threaded ball spring plungers GN 615.3-NI

GN 615.3 pressure positioners

AISI-303 stainless steel body.

Tempered stainless steel ball.


Stainless steel spring for normal load (KN model) or for heavy load (KSN model with yellow background).

Fixing with Allen key.

The high degree of corrosion resistance of AISI-303 stainless steel makes these elements especially suitable for medical machinery and equipment for the food and pharmaceutical industries.

[Catalog access](#)

Image not found or type unknown

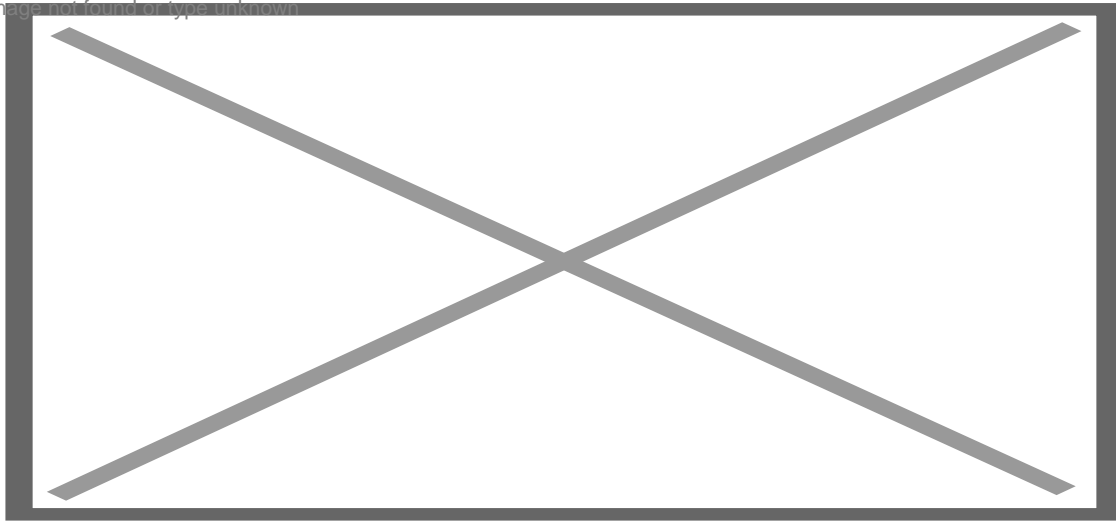

Technical information

Código	Elementos standard	Dimensiones principales				Presión muelle [N~]		Peso
		d1	d2 l ±0.1	w	A/F	Pretensado	Carga máx.	
	GN 615.3-M3-KN	M3	1.5 8	0.4	1.5	3	4.5	2
	GN 615.3-M4-KN	M4	2.5 12	0.8	2	8.6	14.5	4
44310GN33413	GN 615.3-M5-KN	M5	3 14	0.9	2.5	8	14	5
44310GN33423	GN 615.3-M6-KN	M6	3.5 15	1	3	11	18	6

44310GN33433	GN 615.3-M8-KN	M8	4.5	18	1.5	4	18	31	10
	GN 615.3-M10-KN	M10	6	23	2	5	24	45	12
	GN 615.3-M12-KN	M12	8	26	2.5	6	26	49	25
	GN 615.3-M16-KN	M16	10	33	3.5	8	41	86	32
	GN 615.3-M20-KN	M20	12	43	4.5	10	56	111	37
	GN 615.3-M24-KN	M24	15	48	5.5	12	81	151	43
	GN 615.3-M5-KSN	M5	3	14	0.9	2.5	8	14	1
	GN 615.3-M6-KSN	M6	3.5	15	1	3	11	18	2
	GN 615.3-M8-KSN	M8	4.5	18	1.5	4	18	31	4
	GN 615.3-M10-KSN	M10	6	23	2	5	24	45	8
	GN 615.3-M12-KSN	M12	8	26	2.5	6	26	49	13
	GN 615.3-M16-KSN	M16	10	33	3.5	8	41	86	32
	GN 615.3-M20-KSN	M20	12	43	4.5	10	56	111	36
	GN 615.3-M24-KSN	M24	15	48	5.5	12	81	151	43