

## 3-Piece Ball Valve-Full Bore (Art. 025-026-027)

### Characteristics:

FULL BORE BALL VALVE 3 PIECES

ART. 025: DIN 259 GAS THREAD

ART. 026: BUTT WELD ANSI B 16.25

ART. 027: SOCKET WELD ANSI B 16.11


CONST.: STAINLESS STEEL. CF8M (316) MICROFUSION

TERMINALS: PTFE SEATS+15% FV.

PN - 70 (1000 PSI WOG) TEMP. -25°C + 200°C

PN - 10 (150 PSI WSP) TEMP.+ 180°C

MANUAL CONTROL BY LEVER

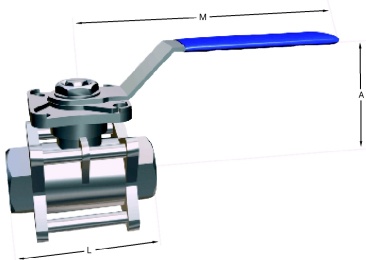

### Technical information

Medida	P	L	A	M	T	B	S	K	ISO 5211	Peso
1/4"	11	49,6	62	112	13	10	14,1	10	F-03	0.39
3/8"	12,7	49,6	62	112	14,7	12,5	17,5	10	F-03	0.38
1/2"	15	56	63	112	17	15	21,7	10	F-04	0.44
3/4"	20	73	70	138	22	20	27,1	13	F-04 / F-05	0.82
1"	25	82	73	138	28	25	33,8	13	F-04 / F-05	1.02
1 1/4"	32	91	88	160	35,8	31,8	42,5	13	F-05 / F-07	1.79
1 1/2"	40	104	94	160	43	40	48,6	13	F-05 / F-07	2.42
2"	50	120	100	160	54	50	61,1	16	F-05 / F-07	3.47
2 1/2"	65	155	146	330	70	65	73,8	16	F-07 / F-10	8.5
3"	80	182	157	330	85	80	89,8	16	F-07 / F-10	12.4
4"	100	225	175	340	105	100	115	16	F-07 / F-10	21.35