


VB.639 S-INOX

- Special technopolymer reinforced with fiberglass, black color, matte finish. Resistant to solvents, oils, greases and other chemical agents.
- AISI-303 stainless steel insert with threaded through hole.
- This three-arm handwheel has been designed for heavy duty work where the use of a plastic hammer is recommended to achieve the most forceful locking.

[Access to catalogs](#)

Image not found or type unknown

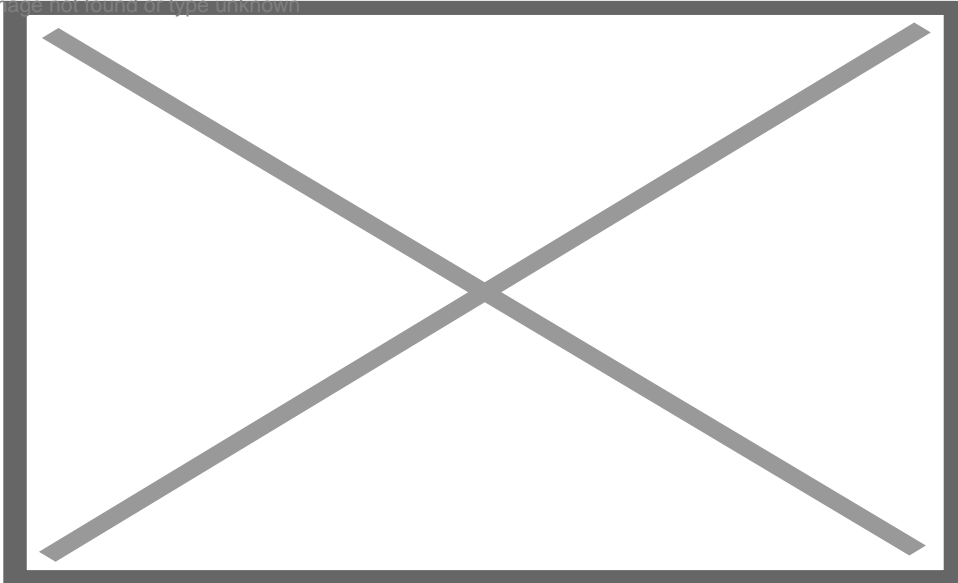

Technical information

| Elementos standard | | Descripción | Dimenciones principales | | | | Agujero de montaje | | C# | L# | Peso | |
|--------------------|--------|----------------------|-------------------------|----|----|----|--------------------|------|----|------|------|----|
| Código | Código | | D | L | d1 | d3 | I1 | d 6H | h | [Nm] | [J] | g |
| 4431065638 | 65638 | VB.639/63 S-M8-INOX | 63 | 28 | 26 | 18 | 25 | M8 | 15 | 30 | 7 | 49 |
| 4431065678 | 65678 | VB.639/80 S-M10-INOX | 80 | 35 | 32 | 21 | 30 | M10 | 17 | 80 | 6 | 61 |

| | | | | | | | | | |
|------------|-------|-----------------------|-----|----------|-----|----|-----|---|-----|
| 4431065708 | 65708 | VB.639/100 S-M12-INOX | 100 | 42362536 | M12 | 20 | 110 | 8 | 97 |
| 4431065748 | 65748 | VB.639/130 S-M16-INOX | 130 | 47432940 | M16 | 22 | 135 | 9 | 164 |