

## Steering wheel VC.192 S / VC.192 S-p


### Lobed Knob with Stainless Steel Insert VC.192 S

- Black duroplast. Resistant to solvents, oils, greases and other chemical agents.
- AISI-303 stainless steel boss, tapped blind hole.

The five-lobe shape of the knob ensures a solid hand grip and it's smooth, non-porous surface prevents the deposit of unsanitary residues.

[Access to catalogs](#)

Image not found or type unknown

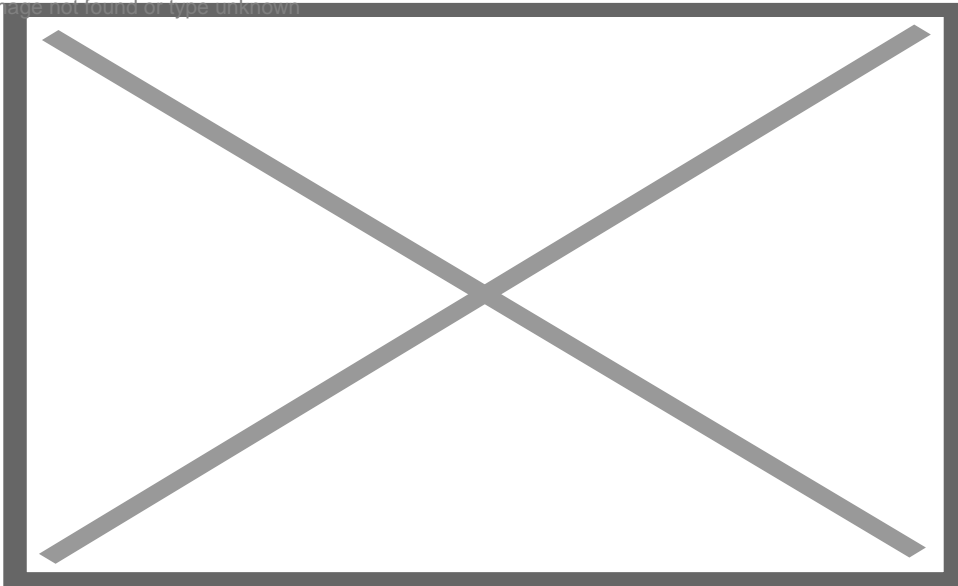

### Technical information

Elementos standard

Dimensiones principales

Agujero de montaje

Peso

Código	Código	Descripción	D	L	d1	l2	d 6H	h	g	
4431066226	66226	VC.192/30 S-M6-INOX	32	23	19	11	m6	12	18	
4431066346	66346	VC.192/40 S-M8-INOX	40	27	21	12	m8	13	30	
4431066476	66476	VC.192/50 S-M10-INOX	50	33	25	14	m10	17	50	
4431066556	66556	VC.192/60 S-M12-INOX	60	37	27	17	m12	20	78	
Elementos standard			Dimensiones principales				Espárrago roscado		Peso	
Código	Código	Descripción	D	L	d1	l2	d 6g	l	g	
4431066263	66261	VC.192/30 S-p-M6x10-INOX	32	23	19	11	M6	10	17	
	66262	VC.192/30 S-p-M6x16-INOX	32	23	19	11	M6	16	18	
	66263	VC.192/30 S-p-M6x20-INOX	32	23	19	11	M6	20	20	
	66268	VC.192/30 S-p-M6x35-INOX	32	23	19	11	M6	35	25	
4431066381	66381	VC.192/40 S-p-M8x20-INOX	40	27	21	12	M8	20	37	
4431066382	66382	VC.192/40 S-p-M8x25-INOX	40	27	21	12	M8	25	38	
4431066383	66383	VC.192/40 S-p-M8x30-INOX	40	27	21	12	M8	30	39	
	66384	VC.192/40 S-p-M8x35-INOX	40	27	21	12	M8	35	40	
	66388	VC.192/40 S-p-M8x45-INOX	40	27	21	12	M8	45	43	
	66496	VC.192/50 S-p-M10x20-INOX	50	33	25	14	M10	20	63	
	66497	VC.192/50 S-p-M10x30-INOX	50	33	25	14	M10	30	66	
4431066498	66498	VC.192/50 S-p-M10x40-INOX	50	33	25	14	M10	40	70	
	66499	VC.192/50 S-p-M10x50-INOX	50	33	25	14	M10	50	73	
	66591	VC.192/60 S-p-M12x30-INOX	60	37	27	17	M12	30	110	
4431066593	66593	VC.192/60 S-p-M12x40-INOX	60	37	27	17	M12	40	118	
	66595	VC.192/60 S-p-M12x50-INOX	60	37	27	17	M12	50	128	
4431066671	66671	VC.192/70 S-p-M12x70-INOX	70	44	30	20	M12	70	175	