

Steering wheel VC.692 S / VC.692 S-P

Steering wheel with stainless steel insert VC.692 S

- Special technopolymers reinforced with fiberglass, standard black color, matte finish. Resistant to solvents, oils, greases and other chemical agents.
- AISI-303 stainless steel insert with threaded blind hole.

This technopolymer flywheel has been designed for applications on machines and equipment where, for hygiene reasons, all parts must be cleaned frequently using even pressurized water jets or steam.

The shape of the five lobes provides a solid and secure hand grip that, as it is presented on a smooth surface without concavities, prevents the deposit of unhygienic residual substances.

[Access to catalogs](#)

Steering wheel with stainless steel stud VC.692 S-p


- Special technopolymers reinforced with fiberglass, standard black color, matte finish. Resistant to solvents, oils, greases and other chemical agents.
- AISI-303 stainless steel stud with chamfered terminal.

This technopolymer flywheel has been designed for applications on machines and equipment where, for hygiene reasons, all parts must be cleaned frequently using even pressurized water jets or steam.

The shape of the five lobes provides a solid and secure hand grip that, as it is presented on a smooth surface without concavities, prevents the deposit of unhygienic residual substances.

[Access to catalogs](#)

Image not found or type unknown

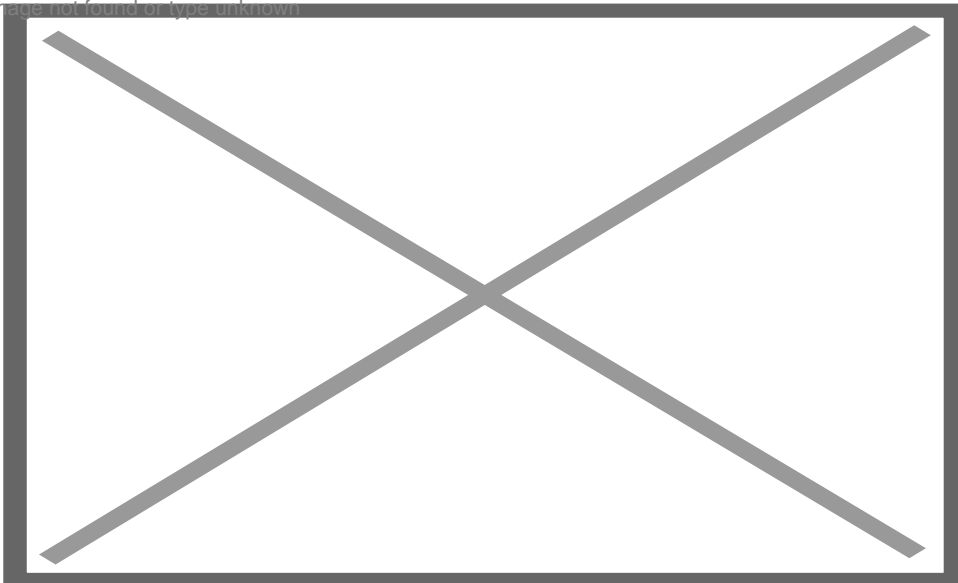



Technical information

Elementos standard			Dimensiones principales				Agujero de montaje		Peso	
Código	Código	Descripción	D	L	d1	d2	d 6H	h	g	
	166226	VC.692/32 S-M6-INOX	32	22.5	14	12.5	M6	10	15	
	166346	VC.692/40 S-M8-INOX	40	26	15	14	M8	13	24	
	166476	VC.692/50 S-M10-INOX	50	31	18	17	M10	17	42	
	166556	VC.692/60 S-M12-INOX	60	36.5	21	21	M12	20	54	

Elementos standard			Dimensiones principales				Espárrago roscado		Peso	
Código	Código	Descripción	D	L	d1	l2	d 6g	l	g	
	166262	VC.692/32 S-p-M6x16-INOX	32	22.5	14	12.5	M6	16	15	
	166263	VC.692/32 S-o-M6x20-INOX	32	22.5	14	12.5	M6	20	16	
44310166264	166264	VC.692/32 S-p-M6x30-INOX	32	22.5	14	12.5	M6	30	19	
44310166381	166381	VC.692/40 S-p-M8x20-INOX	40	26	15	14	M8	20	28	
	166383	VC.692/40 S-p-M8x30-INOX	40	26	15	14	M8	30	32	
	166385	VC.692/40 S-p-M8x40-INOX	40	26	15	14	M8	40	36	
	166491	VC.692/50 S-p-M10x20-INOX	50	31	18	17	M10	20	47	
	166493	VC.692/50 S-p-M10x30-INOX	50	31	18	17	M10	30	57	
	166495	VC.692/50 S-p-M10x40-INOX	50	31	18	17	M10	40	67	
	166591	VC.692/60 S-p-M12x30-INOX	60	36.5	21	21	M12	30	70	
	166593	VC.692/60 S-p-M12x40-INOX	60	36.5	21	21	M12	40	81	
	166595	VC.692/60 S-p-M12x50-INOX	60	36.5	21	21	M12	50	92	