


## Stainless steel disc flywheels VD.FP-SST

### VD.FP-SST

Disc flywheels in stainless steel with reinforced phenolic-based (PF) duroplastic, high resistance. Resistant to solvents, oils, greases and other chemical agents

[Catalog access](#)

Image not found or type unknown

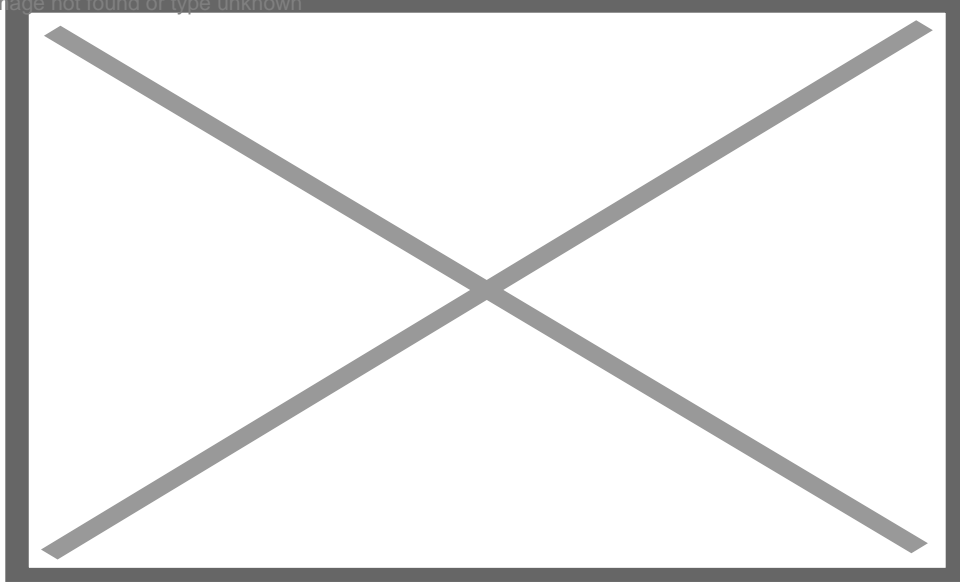

### Technical information

| Elementos estándar |        |               | Dimensiones principales |    |    |    |    |    |    |    |    |    | Agujeros máx. permisibles |     |      |   | C #  | L # | Peso |
|--------------------|--------|---------------|-------------------------|----|----|----|----|----|----|----|----|----|---------------------------|-----|------|---|------|-----|------|
| Código             | Código | Descripción   | D                       | L  | B  | d1 | d2 | d3 | d4 | d5 | I  | I2 | d'                        | d'' | t    | b | [Nm] | [J] | g    |
|                    | 70461  | VD.100 FP-SST | 100                     | 40 | 15 | 24 | 20 | 35 | 54 | 39 | 36 | 12 | 16                        | 13  | 15.3 | 5 | 150  | 11  | 260  |

|       |               |     |                      |    |                       |
|-------|---------------|-----|----------------------|----|-----------------------|
| 70561 | VD.125 FP-SST | 125 | 4415322444 70 463815 | 20 | 1618.3 5 300 14 380   |
| 70761 | VD.150 FP-SST | 150 | 4818322444 70 483815 | 20 | 1618.3 5 300 19 510   |
| 70961 | VD.200 FP-SST | 200 | 5721403155 90 604315 | 26 | 2224.8 6 700 36 970   |
| 71161 | VD.250 FP-SST | 249 | 6525493866110704415  | 35 | 2730.3 8 1300 40 1520 |
| 71261 | VD.300 FP-SST | 301 | 7525585894148825618  | 42 | 3841.3101500 48 2920  |