


Tornillo cabeza alomada con impronta H DIN-7985 ISO-7045

Tornillo cabeza alomada con impronta cruzada H (Philips) en acero inoxidable **DIN-7985 = ISO-7045**.

Calidades acero inoxidable A, A-2, A-4 y otras bajo consulta.

| AISI | A | DIN EN | DESIGNACION
 | 304 | A2 | 1.4301 | X5CrNi 18-10
 | 316 | A4 | 1.4401 | X5CrNiMo 17-12-2

[Acceso al catálogo](#)

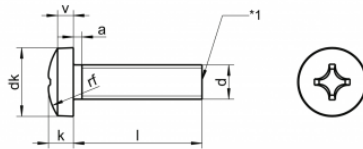

Información técnica

| M | M 3 | M 4 | M 5 | M 6 | M 8 | M 10 | M 12 |
|------|------|-----|-----|------|------|------|------|
| Peso | 0.5 | 0.7 | 0.8 | 1 | 1.25 | 1.5 | 1.75 |
| D | 5.7 | 7.5 | 9.5 | 10.5 | 14 | 18 | 21 |
| k | 1.65 | 2.1 | 2.7 | 3.2 | 4.3 | 5.3 | 6.4 |
| s | 2 | 2.5 | 3 | 4 | 5 | 6 | 8 |
| r | | 0.2 | 0.2 | 0.25 | 0.4 | 0.4 | 0.6 |