

Flange Adaptor


Manufacturing standards: DVGW round tubes manufactured according to DIN-1988/2463 EN 10312 Tubes with DVGW TS 225 approval correspond to the requirements of DVGW worksheet W 541

Certificates: Standard supply in lengths of 6 m. We provide product certificates if required, according to the following standard: EN 10204/3.1.B or DIN 50049.

Grades: Austenitic grades types 304-L, 316-L

Dimensions: Manufactured in diameters from 15 mm to 108 mm. Wall thicknesses from 1 to 2 mm

Applications: DVGW W 541 tubes are used in the transport of drinking and chlorinated water up to 2 mg/l in water with AISI-316 L pipes, AISI-304 L quality is used in compressed air installations.

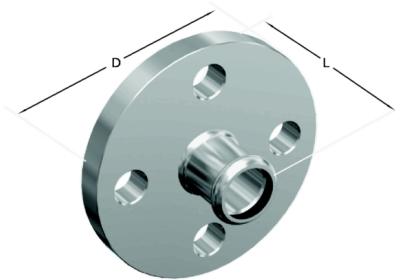

Technical information

DN	Dimensiones				Art.
	Tubo Ø	L	Taladros	D	
12	15	56	4	95	3702
15	18	57	4	95	3703
20	22	59	4	105	3704
25	28	65	4	115	3705
32	35	69	4	140	3706
40	42	77	4	150	3707
50	54	87	4	165	3708
65	76,1	126	4	185	3709
80	88,9	143	8	200	3710
100	108	168	8	220	3711