


Double elbow

Features: Compression fittings with double cutting edge ring (P-DR) DIN 3861 class B (standard version).

Regulations: The regulations for threaded compression fittings for pipes are based on the DIN 2353 standard.

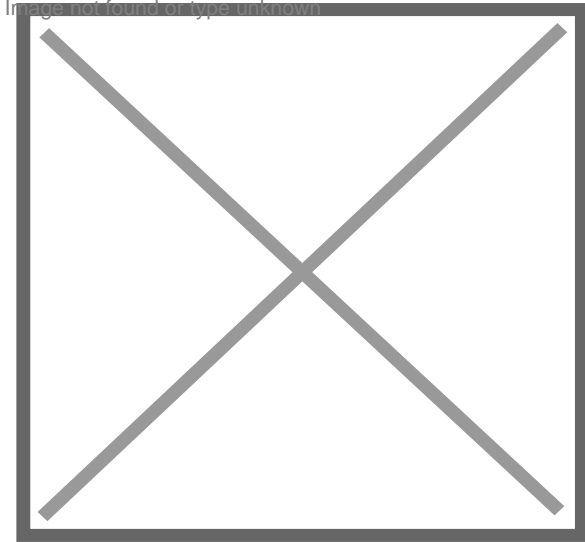

Technical information

| Código | Serie | PN | D2 | S2 | S1 | L1 | L2 |
|--------------|---------------|-----|----|----|----|----|----|
| | Baja Presión | 100 | 4 | 10 | 9 | 31 | 12 |
| | Baja Presión | 100 | 6 | 12 | 11 | 32 | 9 |
| | Baja Presión | 100 | 8 | 14 | 12 | 35 | 12 |
| 18032031CD06 | Media Presion | 250 | 6 | 14 | 12 | 39 | 10 |
| 18032031CD08 | Media Presion | 250 | 8 | 17 | 14 | 40 | 11 |
| 18032031CD10 | Media Presion | 250 | 10 | 19 | 17 | 42 | 13 |
| 18032031CD12 | Media Presion | 250 | 12 | 22 | 19 | 43 | 14 |
| 18032031CD15 | Media Presion | 250 | 15 | 27 | 24 | 46 | 16 |

| | | | | | | | |
|--|---------------|-----|----|----|----|----|----|
| | Media Presion | 160 | 18 | 32 | 27 | 48 | 16 |
| | Media Presion | 160 | 22 | 36 | 32 | 52 | 20 |
| | Media Presion | 100 | 28 | 41 | 41 | 54 | 21 |
| | Media Presion | 100 | 35 | 50 | 46 | 63 | 20 |
| | Media Presion | 100 | 42 | 60 | 55 | 66 | 21 |
| | Alta Presión | 630 | 6 | 17 | 14 | 45 | 16 |
| | Alta Presión | 630 | 8 | 19 | 17 | 47 | 18 |
| | Alta Presión | 630 | 10 | 22 | 19 | 49 | 27 |
| | Alta Presión | 630 | 12 | 24 | 22 | 51 | 19 |
| | Alta Presión | 630 | 14 | 27 | 24 | 57 | 22 |
| | Alta Presión | 400 | 16 | 30 | 27 | 57 | 21 |
| | Alta Presión | 400 | 20 | 36 | 32 | 66 | 23 |
| | Alta Presión | 400 | 25 | 46 | 41 | 74 | 26 |
| | Alta Presión | 250 | 30 | 50 | 46 | 80 | 27 |
| | Alta Presión | 250 | 38 | 60 | 55 | 90 | 29 |