

Bend 15° Male-Male


Manufacturing standards: DVGW round tubes manufactured according to DIN-1988/2463 EN 10312 Tubes with DVGW TS 225 approval correspond to the requirements of DVGW worksheet W 541

Certificates: Standard supply in lengths of 6 m. We provide product certificates if required, according to the following standard: EN 10204/3.1.B or DIN 50049.

Grades: Austenitic grades types 304-L, 316-L

Dimensions: Manufactured in diameters from 15 mm to 108 mm. Wall thicknesses from 1 to 2 mm

Applications: DVGW W 541 tubes are used in the transport of drinking and chlorinated water up to 2 mg/l in water with AISI-316 L pipes, AISI-304 L quality is used in compressed air installations.

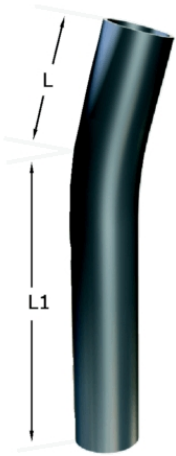

Technical information

| DN | Dimensiones | | | Art. |
|-----|-------------|-----|-----|------|
| | Tubo Ø | L | L1 | |
| 12 | 15 | 39 | 39 | 0892 |
| 15 | 18 | 40 | 40 | 0893 |
| 20 | 22 | 43 | 43 | 0894 |
| 25 | 28 | 45 | 45 | 0905 |
| 32 | 35 | 53 | 53 | 0906 |
| 40 | 42 | 59 | 59 | 0907 |
| 50 | 54 | 67 | 67 | 0908 |
| 65 | 76,1 | 163 | 163 | 0909 |
| 80 | 88,9 | 160 | 160 | 0910 |
| 100 | 108 | 154 | 154 | 0911 |