

## Bend 30° Male-Male


**Manufacturing standards:** DVGW round tubes manufactured according to DIN-1988/2463 EN 10312 Tubes with DVGW TS 225 approval correspond to the requirements of DVGW worksheet W 541

**Certificates:** Standard supply in lengths of 6 m. We provide product certificates if required, according to the following standard: EN 10204/3.1.B or DIN 50049.

**Grades:** Austenitic grades types 304-L, 316-L

**Dimensions:** Manufactured in diameters from 15 mm to 108 mm. Wall thicknesses from 1 to 2 mm

**Applications:** DVGW W 541 tubes are used in the transport of drinking and chlorinated water up to 2 mg/l in water with AISI-316 L pipes, AISI-304 L quality is used in compressed air installations.

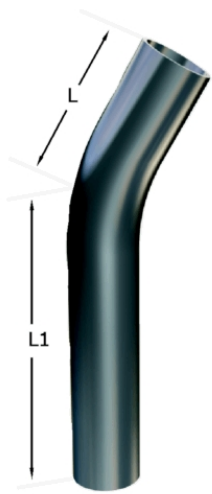

### Technical information

DN	Dimensiones			Art.
	Tubo Ø	L	L1	
12	15	60	122	0932
15	18	55	128	0933
20	22	50	124	0934
25	28	51	130	0935
32	35	80	214	0936
40	42	99	272	0937
50	54	134	326	0938
65	76,1	201	201	0939
80	88,9	241	241	0940
100	108	263	263	0941