


## Machine feet Type H Hygienic - Fixing

### Type H Hygienic - Fixation

Hygienic model, which has a protruding plate with lug, which allows it to be fixed to the floor, in order to absorb vibrations.

It can absorb up to 10° of unevenness in the ground and equipment.

[Catalog access](#)

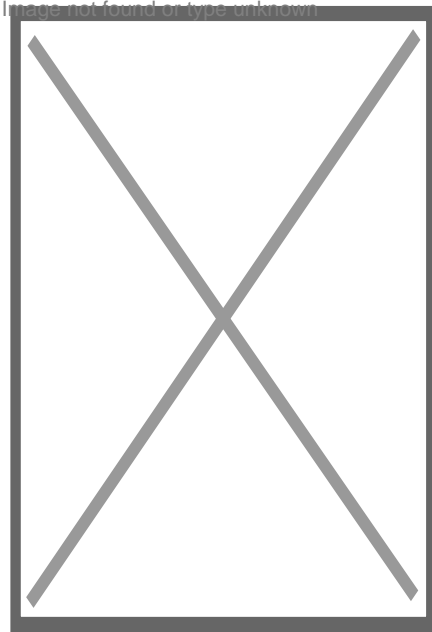

### Technical information

Base						
Código	Descripción	Diámetro Ø	Altura B	Longitud E	Diámetro del agujero D1	Carga nom.
	H 81 Chapa saliente con una oreja	80 mm	28 mm	58 mm	14 mm	15.000 N

	H 82 Chapa saliente con dos oreajs	80 mm	28 mm	58 mm	14 mm	15.000 N
	H 101 Chapa saliente con una oreja	100 mm	33 mm	68 mm	14 mm	20.000 N
<b>Espárrago roscado</b>						
<b>Código</b>	<b>Artículo nº</b>	<b>Métrica D</b>	<b>Longitud A</b>	<b>Longitud L</b>	<b>Llave</b>	
	3A 16181	M 16	166 mm	78 mm	13 mm	
	3A 16231	M 16	216 mm	110 mm	13 mm	
	3A 20181	M 20	166 mm	78 mm	15 mm	
	3A 20231	M 20	216 mm	110 mm	15 mm	
	3A 24181	M 24	166 mm	78 mm	19 mm	
	3A 24231	M 24	216 mm	110 mm	19 mm	
	3A 30181	M 30	166 mm	78 mm	24 mm	
	3A 30231	M 30	216 mm	110 mm	24 mm	
	3A 36181	M 36	166 mm	78 mm	30 mm	
	3A 36231	M 36	216 mm	110 mm	30 mm	