


## Threaded pressure plungers with ball and spring GN 615-NI

### GN 615 pressure positioners

- AISI-303 stainless steel body.
- Tempered stainless steel ball.
- Stainless steel spring for normal load (KN model) or for heavy load (KSN model with yellow background).
- Fixing with flat screwdriver.

The high degree of corrosion resistance of AISI-303 stainless steel makes these elements especially suitable for medical machinery and equipment for the food and pharmaceutical industries.

[Catalog access](#)

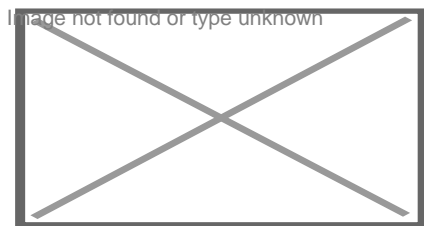

### Technical information

Código	Elementos standard	Dimensiones principales				Presión muelle [N~]		Peso
	Descripción	d 6g	d1	l ±0.1	l1	Pretensado	Carga máx.	g
	GN 615-M3-KN	M3	1.5	7	0.4	3	4.5	1
	GN 615-M4-KN	M4	2.5	9	0.8	6	14.5	1
	GN 615-M5-KN	M5	3	12	0.9	8	14	1
	GN 615-M6-KN	M6	3.5	14	1	11	18	2
	GN 615-M8-KN	M8	4.5	16	1.5	18	31	4
	GN 615-M10-KN	M10	6	19	2	24	45	7

44310GN33153	GN 615-M12-KN	M12	8	22	2.5	26	49	10
44310GN33163	GN 615-M16-KN	M16	10	24	3.5	41	86	24
	GN 615-M20-KN	M20	12	30	4.5	56	111	43
	GN 615-M24-KN	M24	15	34	5.5	81	151	70
	GN 615-M5-KSN	M5	3	12	0.9	15	22	1
	GN 615-M6-KSN	M6	3.5	14	1	19	28	2
	GN 615-M8-KSN	M8	4.5	16	1.5	36	62	4
	GN 615-M10-KSN	M10	6	19	2	57	104	7
	GN 615-M12-KSN	M12	8	22	2.5	61	110	10
	GN 615-M16-KSN	M16	10	24	3.5	68	142	24
	GN 615-M20-KSN	M20	12	30	4.5	84	166	43
	GN 615-M24-KSN	M24	15	34	5.5	127	237	70