

## Three-spoke steering wheels GN 950.6.F

### GN 950.6.F


Three-spoke steering wheels with fixed handle in AISI-316 quality stainless steel

Acid resistant

With a machined center and with a turned and polished edge and with an unmachined matte shot-peened surface.

[Catalog access](#)

Image not found or type unknown

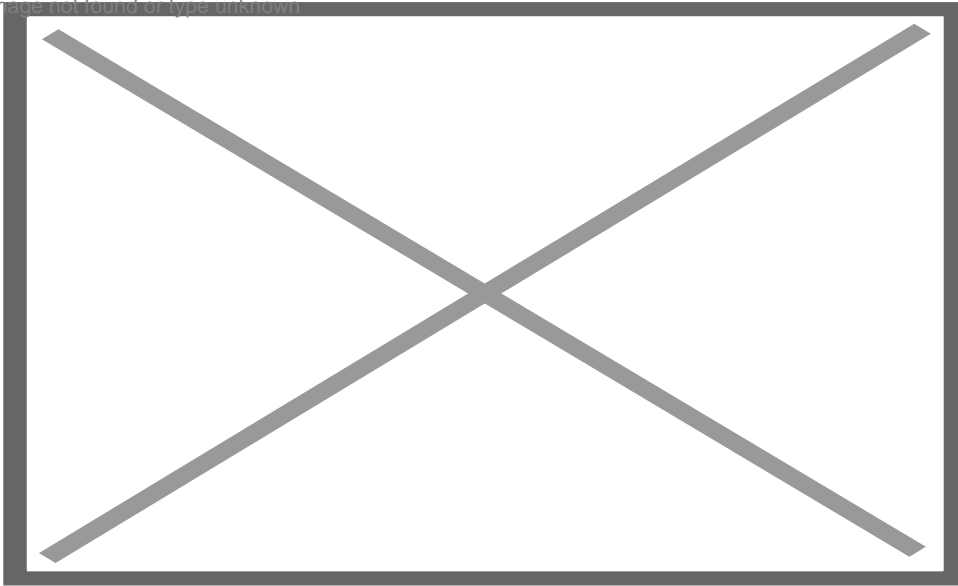

### Technical information

Elementos estándar		Dimensiones principales				Agujero	Empuñadura				Núm. radios	Peso
Código	Descripción	d1	d3 ?	b	l2 ?	d2 H9	l1	l3	Ø	r	d4	g

GN 950.6-100-B10-F	100	25.5	14.5	33	10	17	48.5	1636	M 6	3	480
GN 950.6-100-K10-F	100	25.5	14.5	33	10	17	48.5	1636	M 6	3	470
GN 950.6-125-B12-F	125	27	15.8	35.5	12	18	62	2047	M 8	3	770
GN 950.6-125-K12-F	125	27	15.8	35.5	12	18	62	2047	M 8	3	760
GN 950.6-140-B14-F	140	29	17	38.5	14	19	62	2052	M 8	3	940
GN 950.6-140-K14-F	140	29	17	38.5	14	19	62	2052	M 8	3	930
GN 950.6-160-B14-F	160	31	17.5	39.5	14	20	77	2562	M 10	3	1320
GN 950.6-160-K14-F	160	31	17.5	39.5	14	20	77	2562	M 10	3	1310
GN 950.6-200-B18-F	200	37	20	44.5	18	24	77	2580	M 10	3	2060
GN 950.6-200-K18-F	200	37	20	44.5	18	24	77	2580	M 10	3	2000