

Portella rettangolare 318 X 420 mm apertura interna con snodo  
 Rectangular manhole 318 X 420 mm inward opening with jointed arm  
 Porte rectangulaire 318 X 420 mm ouverture interieure avec rotule  
 Puerta rectangular 318 X 420 mm apertura interior con articulacion  
 Rechteckiges Mannloch 318 X 420 mm Innenöffnung mit Gelenk


a saldare - welding - à souder  
 para soldar - Schweissausführung

## 318 x 420 mm

Pressione massima  
 Max pressure  
 Pression maxima  
 Presión máxima  
 Max Betriebsdruck

**2.0 bar**

Coperchio con Accessori  
 Cover with Accessories  
 Couvercle avec Accessoires  
 Tapa con Accesorios  
 Deckmel mit Zubehör

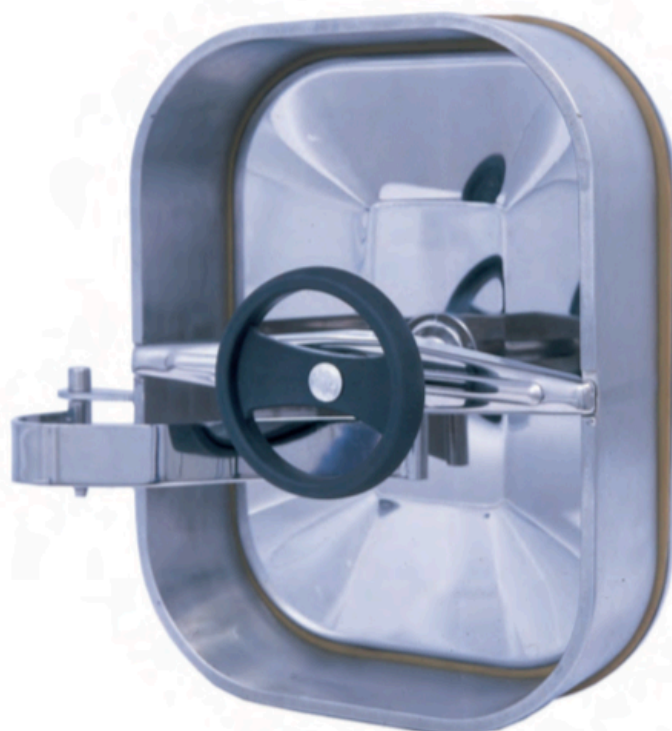

Art.	AISI	S mm	Peso kg Weight
CA12820A	304	2,0	4,7
CA12820B	316	2,0	4,7

Art.	AISI	H mm	T mm	S mm	P max bar	Peso kg Weight
1280600820A	304	60	8	2,0	2,0	9,8
1281000820A	304	100	8	2,0	2,0	13,1
1280601020A	304	60	10	2,0	2,0	11,0
1281001020A	304	100	10	2,0	2,0	15,2
1280600820B	316	60	8	2,0	2,0	9,8
1281000820B	316	100	8	2,0	2,0	13,1
1280601020B	316	60	10	2,0	2,0	11,0
1281001020B	316	100	10	2,0	2,0	15,2

H = Altezza telaio mm  
 Frame Heigt mm  
 Hauteur caadre mm  
 Altura marco mm  
 Hohe des Rahmens mm

T = Spessore telaio mm  
 Frame thickness mm  
 Epaisseur cadre mm  
 Espesor marco mm  
 Starke des Rhamens mm

S = Spessore coperchio mm  
 Cover thickness mm  
 Epaisseur portillon mm  
 Espesor porton mm  
 Starke des Deckels mm

